

AUX
COMMERCIAL AIR CONDITIONER

R290

AIR TO WATER
HEAT PUMP



Facebook: AUX Air Conditioner Heat Pump Europe

auxcool.com

WIENKRA
Cracow: ul.Kotlasrka 34
Warsaw-Janki: ul. Sokołowska 15
Wrocław: al. Armii Krakowej 61
Kokotów (Warehouse): Kokotów 812B

MILESTONE

STARTUP & DEVELOPMENT (1986-2022)

Start-up & development (1986-2010)

Started from scratch, developed by self-improvement, completed the existing industrial structure

1986
started business

1994
Entered the air-conditioning industry and created the brand of AUX

1989
Entered the meter industry and later created the brand of Sanxing

2000
Enter the real estate industry

2003
Entered The CAC Field

2004
Got CNAS Certification

2009
Entered the investment industry

2011
Sanxing Electrical (601567.SH) was listed in Shanghai Stock Exchange and later renamed as "Sanxing Medical"

Transformation and future (2011-present)

Took the first step in mindset changes, industrial transformation, capital transformation and strategy transformation

2012
Successively set up R&D centers in Hangzhou and Ningbo to promote the research and application of smart grid and smart home appliance technologies

2014
Established the medical group to deploy the medical and health strategy

2015
Built overseas plants in Brazil and Indonesia
Developed overseas real estate in Australia
Acquired a company in Hongkong Stock Exchange and renamed it as AUX International (02080.HK)

2016
The scale of air-conditioners jumped to the third place in the industry, and a new smart home appliance export production base was built

2018
Prepared to build smart home appliance production bases in Thailand and Zhengzhou Dedicated to making AUX Japanese R&D Center a global home appliance R&D highland

2020
Zhengzhou Intelligent Home Appliance Manufacturing Base Project started

2021
Became the official exclusive supplier of air conditioners for the 19th Asian Games Hangzhou 2022

2023
Vigorously promote the development of overseas own-brand products and establish sales companies in Malaysia, Thailand and the United States



R290 Monoblock



High capacity

- Finned heat exchanger area ↑ 17%
- Enlarged plate heat exchanger
- Fan blade area ↑ 10%
- Compressor displacement ↑ 55%

*Compare with AUX R32 heat pump

100% output with no capacity reduction at -7°C
 Supplying hot water at 80°C in an environment of -10°C



*Data Source: AUX Performance Lab, 2023.10.16

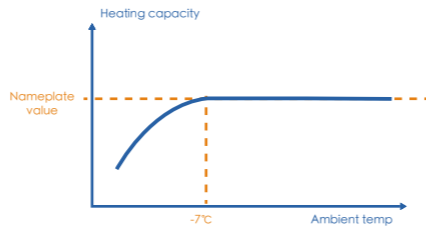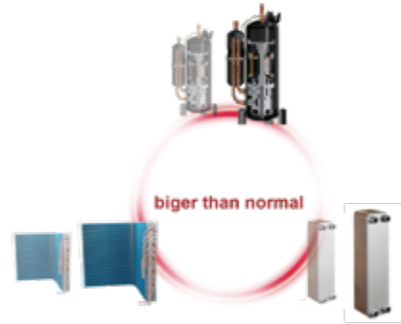

High energy efficient

Main components use DC control, high operational efficiency


The water temperature is 35°C and 55°C, SCOP is A+++

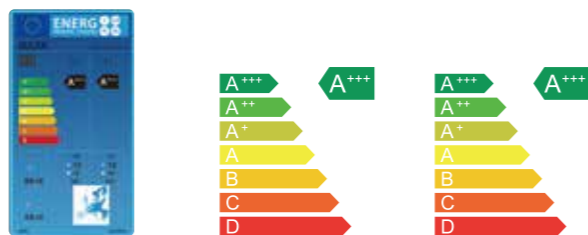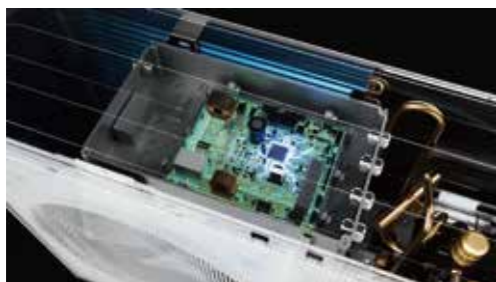

*Data Source: keymark, Patent No: 011-1W0741

Sealed electrical control box

- 3mm aluminum box
- Internal fan design for even heat dissipation
- Add external cooling fins

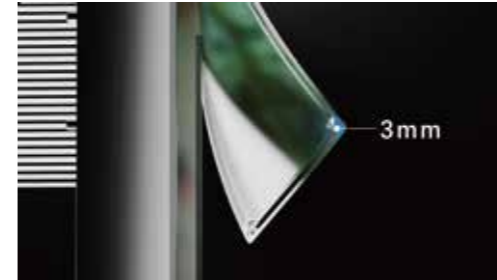


Explosion-proof

Airtight electric control box, separated from leaked refrigerant
 Explosion-proof joints and parts




Harte impulskontrolle

- The compressor is wrapped with sound-absorbing materials
- With damping material in the middle
- Folded edge fan has a large angle design to reduce vortex noise
- Unique mesh cover to reduce wind resistance
- Built-in sound insulation cotton in many places
- The noise of the outdoor unit is as low as 35dB three meters away

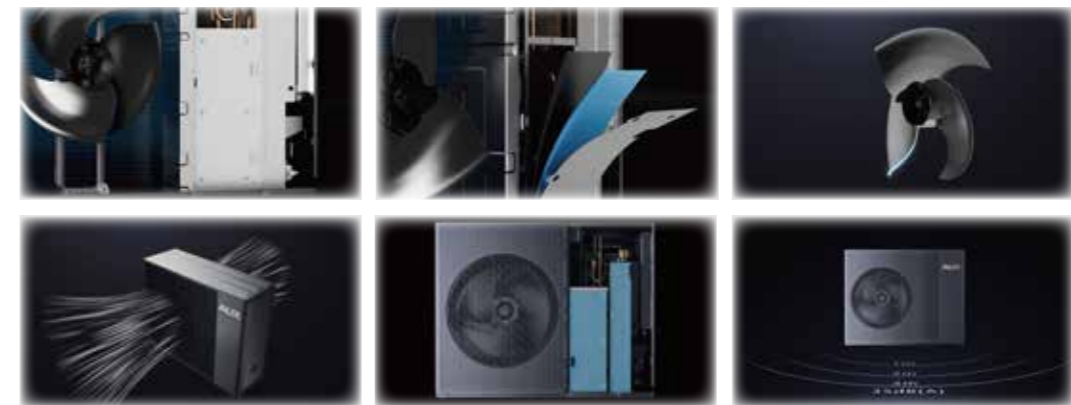

*Data Source: AUX Noise Laboratory, 2023.03.15


Color screen remote controller

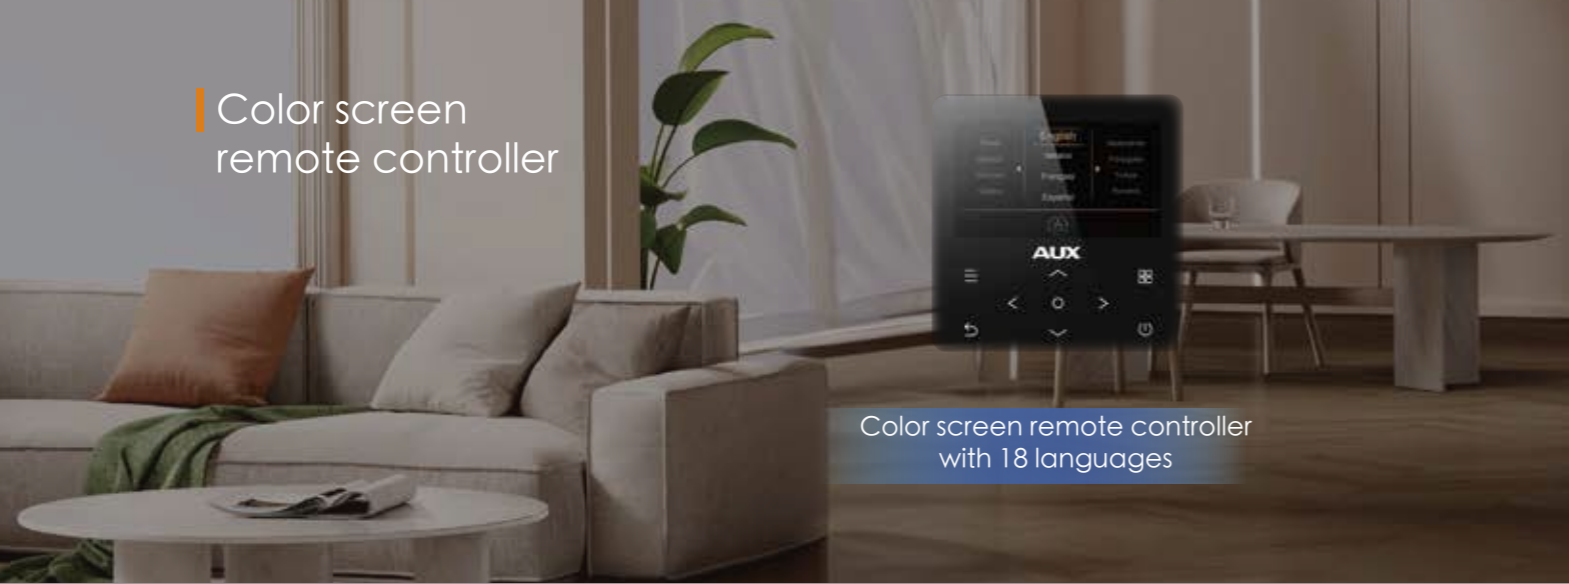

Color screen remote controller with 18 languages


Cascade function

- Up to 8 units can be connected in parallel, the capacity can up to 128kW
- Can freely choose the number of domestic hot water units, suitable for scenarios with large domestic hot water consumption

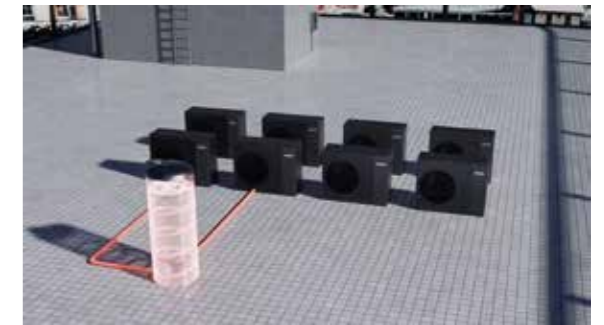


APP control

Support parameter setting, power consumption query, holiday mode, etc

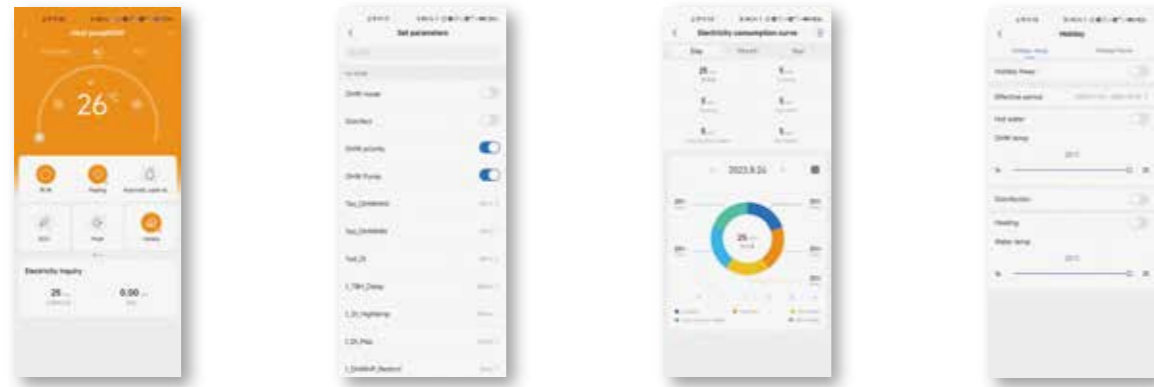


Intelligent control the running time of each units

By accurately calculating the program, ensure that the running time of each machine is the same

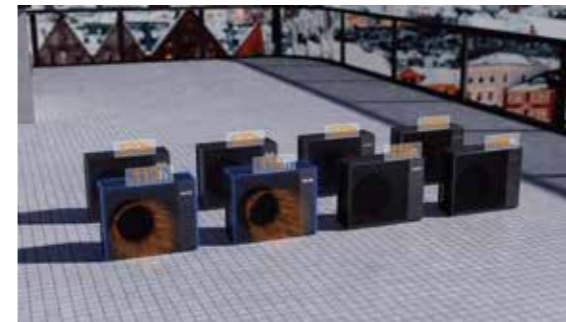

Precise temperature control

- The mixing valve adopts 0-10V control to accurately control the inlet water temperature of the underfloor heating system
- Room temperature changes within $\pm 0.5^{\circ}\text{C}$

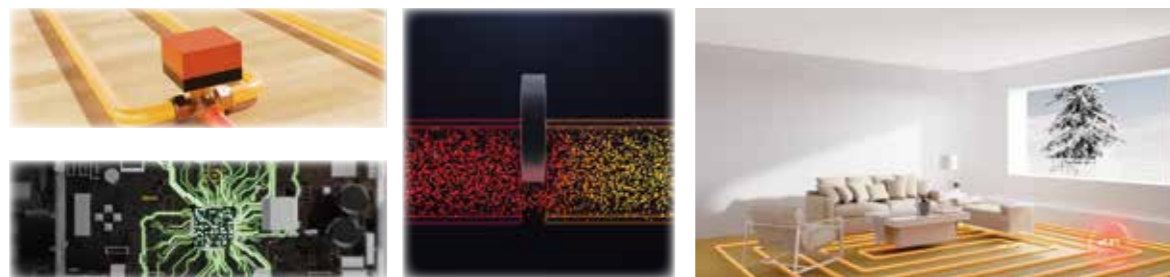

Remote control

Sitting in the office, remotely monitoring the units operation status and modifying operation parameters



Convenience

The side panel can be opened directly



Program update

The wired controller built-in USB port, which can be used to upgrade program



Backup power & Gas boiler

- Can be connected to the backup power to maintain normal operation of the units after the power grid is cut off
- Can be connected with a gas boiler. When the units capacity is insufficient, turn on the gas boiler as an auxiliary heat source



Specification-Monoblock

Model name			4kW	6kW	8kW	10kW
Model			ACHP-H04/4R2HA-M	ACHP-H06/4R2HA-M	ACHP-H08/4R2HA-M	ACHP-H10/4R2HA-M
Power supply		V/Ph/H	220-240/1/50			
Heating2	Capacity	kW	4.5	6.35	8.4	10.0
	Rated input	kW	0.87	1.28	1.68	2.08
	COP			5.15	4.95	5.0
Heating3	Capacity	kW	4.6	6.4	7.8	9.5
	Rated input	kW	1.44	2.03	2.36	2.92
	COP			3.2	3.15	3.3
Cooling4	Capacity	kW	4.5	6.5	8.3	10.0
	Rated input	kW	0.82	1.27	1.61	2.11
	EER			5.5	5.1	5.15
Cooling5	Capacity	kW	4.7	6.8	7.5	8.9
	Rated input	kW	1.29	2.19	2.17	2.74
	EER			3.65	3.1	3.45
Seasonal space heating energy efficiency class ⁷	LWT at 35°C		A+++	A+++	A+++	A+++
	LWT at 55°C		A+++	A+++	A+++	A+++
SCOP ⁶	LWT at 35°C		4.96	4.96	5.15	5.15
	LWT at 55°C		3.90	3.90	3.875	3.925
Water pump	Pump head	m	9			
	Max Flow	m³/h	4.5			
	Adapter diameter		DN25			
sound pressure level	Monobloc Unit	dB(A)	43	43	44	44
Sound power level	Monobloc Unit	dB	56	57	57	57
Packed dimensions (W×D×H)	Monobloc Unit	mm	1205*555*870			1355*545*1210
Body dimensions (W×D×H)	Monobloc Unit	mm	1130*450*740			1280*450*1040
Net weight	Monobloc Unit	kg	93			141
Gross weight	Monobloc Unit	kg	104			154
Operating temperature range	Cooling	°C	-5 ~ 43			
	Heating	°C	-25 ~ 35			
	DHW(tank)	°C	-25 ~ 43			
Setting water temperature range	Cooling	°C	5 ~ 25			
	Heating	°C	25 ~ 80			
	DHW(tank)	°C	30 ~ 75			
Water circuit	Piping connections	inch	G1"BSP			
	Safety valve set pressure	MPa	0.3			
	Flow switch	m³/h	0.36			0.6
	Expansion tank Volume	L	5			
	Capacity of the back-up heater	kW	3			
Stuffing Quantity	40H/40/20	Unit	117/78/36			68/33/16

Note:

1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
2. Outdoor air temperature 7°C DB, 85% R.H.; EWT 30°C, LWT 35°C.
3. Outdoor air temperature 7°C DB, 85% R.H.; EWT 47°C, LWT 55°C.
4. Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.
5. Outdoor air temperature 35°C DB; EWT 12°C, LWT 7°C.
6. Seasonal space heating energy efficiency class tested in average climate conditions.
7. Test standard: EN12102-1
8. Sound pressure level is the maximum value tested under the two conditions of Notes2 and Notes5.

Remarks:

- 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data
- 2.All specifications are subject to change by the manufacturer without prior notice

Specification-Monoblock

Model name			12kW	14kW	16kW
Model			ACHP-H12/4R2HA-M	ACHP-H14/4R2HA-M	ACHP-H16/4R2HA-M
Power supply		V/Ph/H	220-240/1/50		
Heating2	Capacity	kW	12	14	15.1
	Rated input	kW	2.45	2.92	3.21
	COP		4.9	4.8	4.7
Heating3	Capacity	kW	12	14	15.1
	Rated input	kW	3.69	4.38	4.79
	COP		3.25	3.2	3.15
Cooling4	Capacity	kW	12	14	16
	Rated input	kW	2.67	3.89	4.10
	EER		4.5	3.6	3.9
Cooling5	Capacity	kW	11.5	12.7	14
	Rated input	kW	3.8	4.38	5.09
	EER		3.05	2.9	2.75
Seasonal space heating energy efficiency class ⁷	LWT at 35°C		A+++	A+++	A+++
	LWT at 55°C		A+++	A+++	A+++
SCOP6	LWT at 35°C		4.725	4.725	4.775
	LWT at 55°C		3.825	3.825	3.825
Water pump	Pump head	m	9		
	Max Flow	m³/h	4.5		
	Adapter diameter		DN25		
sound pressure level	Monobloc Unit	dB(A)	45	46	47
Sound power level	Monobloc Unit	dB	57	57	58
Packed dimensions (W×D×H)	Monobloc Unit	mm	1355*545*1210		
Body dimensions (W×D×H)	Monobloc Unit	mm	1280*450*1040		
Net weight	Monobloc Unit	kg	156		
Gross weight	Monobloc Unit	kg	169		
Operating temperature range	Cooling	□C	-5 ~ 43		
	Heating	□C	-25 ~ 35		
	DHW(tank)	□C	-25 ~ 43		
Setting water temperature range	Cooling	°C	5 ~ 25		
	Heating	°C	25 ~ 80		
	DHW(tank)	°C	30 ~ 75		
Water circuit	Piping connections	inch	G1"BSP		
	Safety valve set pressure	MPa	0.3		
	Flow switch	m³/h	0.6		
	Expansion tank Volume	L	5		
	Capacity of the back-up heater	kW	3		
Stuffing Quantity	40H/40/20	Unit	68/33/16		

- Note:
1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
 2. Outdoor air temperature 7°C DB, 85% R.H.; EWT 30°C, LWT 35°C.
 3. Outdoor air temperature 7°C DB, 85% R.H.; EWT 47°C, LWT 55°C.
 4. Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.
 5. Outdoor air temperature 35°C DB; EWT 12°C, LWT 7°C.
 6. Seasonal space heating energy efficiency class tested in average climate conditions.
 7. Test standard: EN12102-1
 8. Sound pressure level is the maximum value tested under the two conditions of Notes2 and Notes5.

Remarks:
 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data
 2.All specifications are subject to change by the manufacturer without prior notice

Specification-Monoblock

Model name			8kW	10kW	12kW	14kW	16kW
Model			ACHP-H08/5R2HA-M	ACHP-H10/5R2HA-M	ACHP-H12/5R2HA-M	ACHP-H14/5R2HA-M	ACHP-H16/5R2HA-M
Power supply		V/Ph/H	380-415/3/50				
Heating2	Capacity	kW	8.4	10.0	12	14	15.1
	Rated input	kW	1.68	2.08	2.45	2.92	3.21
	COP		5.0	4.8	4.9	4.8	4.7
Heating3	Capacity	kW	7.8	9.5	12	14	15.1
	Rated input	kW	2.36	2.92	3.69	4.38	4.79
	COP		3.3	3.25	3.25	3.2	3.15
Cooling4	Capacity	kW	8.3	10.0	12	14	16
	Rated input	kW	1.61	2.11	2.67	3.89	4.10
	EER		5.15	4.75	4.5	3.6	3.9
Cooling5	Capacity	kW	7.5	8.9	11.5	12.7	14
	Rated input	kW	2.17	2.74	3.8	4.38	5.09
	EER		3.45	3.25	3.05	2.9	2.75
Seasonal space heating energy efficiency class ⁷	LWT at 35°C		A+++	A+++	A+++	A+++	A+++
	LWT at 55°C		A+++	A+++	A+++	A+++	A+++
SCOP6	LWT at 35°C		5.15	5.15	4.725	4.725	4.775
	LWT at 55°C		3.875	3.925	3.825	3.825	3.825
Water pump	Pump head	m	9				
	Max Flow	m³/h	4.5				
	Adapter diameter		DN25				
sound pressure level	Monobloc Unit	dB(A)	44	44	45	46	47
Sound power level	Monobloc Unit	dB	57	57	57	57	58
Packed dimensions (W×D×H)	Monobloc Unit	mm	1355*545*1210		1355*545*1210		
Body dimensions (W×D×H)	Monobloc Unit	mm	1280*450*1040		1280*450*1040		
Net weight	Monobloc Unit	kg	141		156		
Gross weight	Monobloc Unit	kg	154		169		
Operating temperature range	Cooling	□C	-5 ~ 43				
	Heating	□C	-25 ~ 35				
	DHW(tank)	□C	-25 ~ 43				
Setting water temperature range	Cooling	°C	5 ~ 25				
	Heating	°C	25 ~ 80				
	DHW(tank)	°C	30 ~ 75				
Water circuit	Piping connections	inch	G1"BSP				
	Safety valve set pressure	MPa	0.3				
	Flow switch	m³/h	0.6				
	Expansion tank Volume	L	5				
	Capacity of the back-up heater	kW	9				
Stuffing Quantity	40H/40/20	Unit	68/33/16				

- Note:
1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
 2. Outdoor air temperature 7°C DB, 85% R.H.; EWT 30°C, LWT 35°C.
 3. Outdoor air temperature 7°C DB, 85% R.H.; EWT 47°C, LWT 55°C.
 4. Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.
 5. Outdoor air temperature 35°C DB; EWT 12°C, LWT 7°C.
 6. Seasonal space heating energy efficiency class tested in average climate conditions.
 7. Test standard: EN12102-1
 8. Sound pressure level is the maximum value tested under the two conditions of Notes2 and Notes5.

Remarks:
 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data
 2.All specifications are subject to change by the manufacturer without prior notice



R290 All In One Split

New appearance

Family style appearance, beautiful and generous, High product identification

High energy efficiency

Big compressor, big condensor, big plate heat exchanger, the SCOP can achieve A+++ at 35°C and 55°C, and the ACS can reach A+





Durable and long-lasting

The water tank liner and heat exchange coil are made of 316 stainless steel

Good heat preservation effect


More than 45mm insulation layer, When the water temperature is 55 °C, it only drops by 7 °C within 24 hours

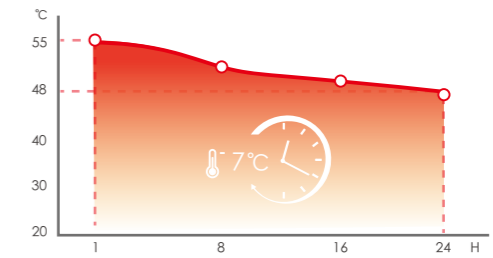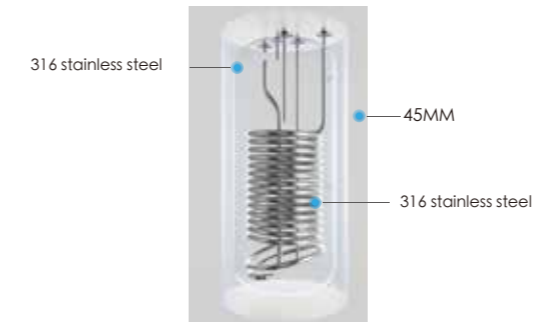

*Data Source: AUX Noise Laboratory,29/07/24

Double temp sensor location

The water tank is equipped with two temperature sensor interfaces, Users can make their own choices based on water consumption

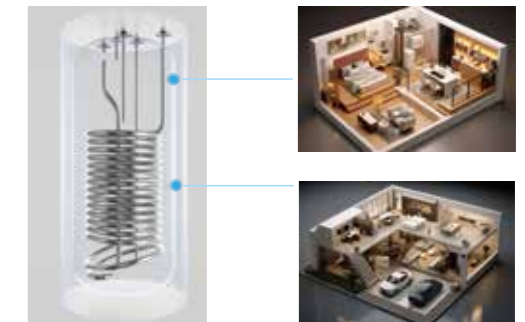

Accurate data monitoring

Build in the water flow sensor, more accurate display of capability and energy efficiency



Safety operation

- Build in water and gas separator and automatic exhaust valve on the outdoor unit, this can prevent refrigerant entering into the room
- Indoor unit installation with manual exhaust valve, When installing, combining indoor and outdoor units can accelerate the exhaust speed

Low noise operation

The outdoor unit uses an independent compressor chamber, large angle fan blades, paste soundproof cotton, it can reach 3m 35dB


Low noise variable frequency water pump used in the indoor unit, operating noise as low as 30dB of 1m

*Data Source: AUX Noise Laboratory, 29/07/24



Build in 3-way valve

Build in 3-way valve, separate connection of domestic hot water and heating/cooling pipe, more convenient of installation

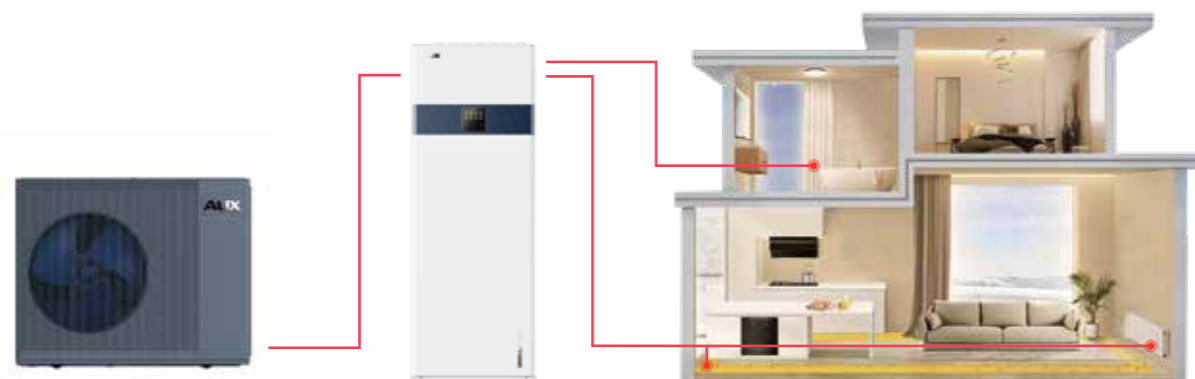

Energy consumption display is more detailed

The power consumption of outdoor units, water pumps, electric heater, and water tank electric heater is displayed separately, convenient for users to manage energy consumption



Multifunctional wired controller

- The WIFI module, MODBUS module and temp sensor is build in wired controller, more convenience for installation
- The USB port is build in wired controller, users can use this to upgrade program and copy and write paratemers, more convenience for installation and after service



Remote upgrade

Can use APP and remote management platform to upgrade the program and use remote management platform to monitor operating status and set operating parameters, more convenience for after service




Full seriee

- DThe water tank has 190L , Can meet the needs of 2-6 households
- Single-phase and three-phase units with 3kW or 9kW electric heater

Powerful mode


Using powerful mode, heating/cooling capacity increases by more than 30%,fast heating/cooling

*Data Source: AUX Laboratory,2024.04

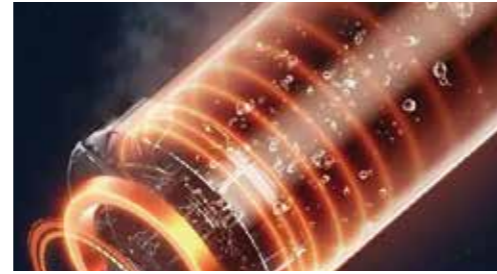

Easy to clean

- The water tank reserved magnesium rod connect port, users can choose whether to use it or not,if use it, the anti-corrosion effect is more better
- Reserve a drainage outlet at the bottom of the water tank,users are easier to clean and empty

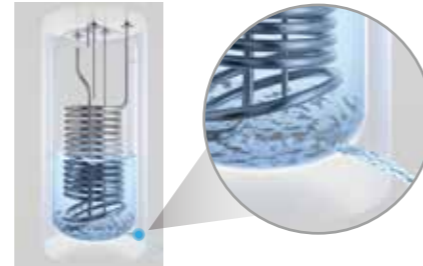

Easy to installation

The indoor unit size is 600*600,cover an area is small and the height is only 1800mm,Can be installed in cupboard,has no impact on indoor aesthetics

No maintenance space needs to be reserved on the side

All installation and maintenance are completed on the front side, No need to reserve installation and maintenance space on the side



All In One Split

Model name		8kW	10kW
Model		ACHA-H08/4R2EA19	ACHA-H10/4R2EA19
Power supply	Monobloc Unit	220-240/1/50	
Heating2	Capacity	8.1	9.8
	Rated input	1.62	2.04
	COP	5	4.8
Heating3	Capacity	7.6	9.4
	Rated input	2.30	2.89
	COP	3.3	3.25
Cooling4	Capacity	8.1	9.8
	Rated input	1.57	2.06
	EER	5.15	4.75
Cooling5	Capacity	7.4	8.8
	Rated input	2.14	2.71
	EER	3.45	3.25
Seasonal space heating energy efficiency class ⁷	LWT at 35℃	A+++	A+++
	LWT at 55℃	A+++	A+++
SCOP ⁶	LWT at 35℃	5.1	5.1
	LWT at 55℃	3.85	3.85
DHW energy efficiency	Water heating energy efficiency class	A+	A+
	COPDHW	2.95	2.95
Declared load profile		L	
Water pump	Pump head	9	9
	Max Flow	4.5	4.5
	Adapter diameter	DN25	DN25
Refrigerant(R290)	Factory charge	0.85	0.85
Sound pressure level	Outdoor Unit	44	44
	Indoor Unit	31	
Sound power level	Outdoor Unit	57	57
	Indoor Unit	43	
Packed dimensions (W×D×H)	Outdoor Unit	1355*545*1210	
	Indoor Unit	700*682*1835	
Body dimensions (W×D×H)	Outdoor Unit	1280*420*1040	
	Indoor Unit	600*600*1720	
Operating temperature range	Cooling	-5 ~ 43	
	Heating	-25 ~ 35	
	Domestic hot water	-25 ~ 43	
Setting water temperature range	Cooling	5 ~ 25	
	Heating	25 ~ 80	
	Domestic hot water	30 ~ 75	
Water circuit	Piping connections	inch	
	DHW Piping connections	inch	
	Safety valve set pressure	MPa	
	Flow switch	m³/h	
	Expansion	Volume	L
	Capacity of the back-up heater	kW	
Stuffing Quantity	Water side	Type	Plate type
	40H/40/20	Outdoor Unit	Unit
		Outdoor Unit	Unit

Note:

- Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
- Outdoor air temperature 7℃ DB, 85% R.H.; EWT 30℃, LWT 35℃.
- Outdoor air temperature 7℃ DB, 85% R.H.; EWT 47℃, LWT 55℃.
- Outdoor air temperature 35℃ DB; EWT 23℃, LWT 18℃.
- Outdoor air temperature 35℃ DB; EWT 12℃, LWT 7℃.
- Seasonal space heating energy efficiency class tested in average climate conditions.
- Test standard: EN12102-1
- Sound pressure level is the maximum value tested under the two conditions of Notes2 and Notes5.

Remarks:

- Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data
- All specifications are subject to change by the manufacturer without prior notice

All In One Split

Model name				12kW	14kW	16kW
Model				ACHA-H12/4R2EA19	ACHA-H14/4R2EA19	ACHA-H16/4R2EA19
Power supply	Monobloc Unit	V/Ph/Hz	220-240/1/50			
Heating2	Capacity	kW	11.6	13.6	15.1	
	Rated input	kW	2.37	2.83	3.21	
	COP		4.9	4.8	4.7	
Heating3	Capacity	kW	11.5	14	14.8	
	Rated input	kW	3.54	4.38	4.70	
	COP		3.25	3.2	3.15	
Cooling4	Capacity	kW	11.6	13.6	15.8	
	Rated input	kW	2.58	3.78	4.05	
	EER		4.5	3.6	3.9	
Cooling5	Capacity	kW	11.1	12.5	14	
	Rated input	kW	3.6	4.31	5.09	
	EER		3.05	2.9	2.75	
Seasonal space heating energy efficiency class ⁷	LWT at 35°C		A+++	A+++	A+++	
	LWT at 55°C		A+++	A+++	A+++	
SCOP6	LWT at 35°C		4.71	4.71	4.75	
	LWT at 55°C		3.825	3.825	3.825	
DHW energy efficiency	Water heating energy efficiency class		A+	A+	A+	
	COPDHW		2.88	2.88	2.88	
	Declared load profile		L			
Water pump	Pump head	m	9	9	9	
	Max Flow	m³/h	4.5	4.5	4.5	
	Adapter diameter		DN25	DN25	DN25	
Refrigerant(R290)	Factory charge	kg	1.35	1.35	1.35	
Sound pressure level	Outdoor Unit	dB(A)	45	46	47	
	Indoor Unit	dB(A)	31			
Sound power level	Outdoor Unit	dB	58	59	60	
	Indoor Unit	dB	43			
Packed dimensions (W×D×H)	Outdoor Unit	mm	1355*545*1210			
	Indoor Unit	mm	700*682*1835			
Body dimensions (W×D×H)	Outdoor Unit	mm	1280*420*1040			
	Indoor Unit	mm	600*600*1720			
Operating temperature range	Cooling	°C	-5 ~ 43			
	Heating	°C	-25 ~ 35			
	Domestic hot water	°C	-25 ~ 43			
Setting water temperature range	Cooling	°C	5 ~ 25			
	Heating	°C	25 ~ 80			
	Domestic hot water	°C	30 ~ 75			
Water circuit	Piping connections	inch	G1"BSP			
	DHW Piping connections	inch	G3/4"BSP			
	Safety valve set pressure	MPa	0.3			
	Flow switch	m³/h	0.6			
	Expansion	Volume	L			
	Capacity of the back-up heater	kW	3			
	Water side	Type	Plate type			
Stuffing Quantity	40H/40/20	Outdoor Unit	Unit			
		Outdoor Unit	Unit			

- Note:
1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
 2. Outdoor air temperature 7°C DB, 85% R.H.; EWT 30°C, LWT 35°C.
 3. Outdoor air temperature 7°C DB, 85% R.H.; EWT 47°C, LWT 55°C.
 4. Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.
 5. Outdoor air temperature 35°C DB; EWT 12°C, LWT 7°C.
 6. Seasonal space heating energy efficiency class tested in average climate conditions.
 7. Test standard: EN12102-1
 8. Sound pressure level is the maximum value tested under the two conditions of Notes2 and Notes5.

Remarks:

- 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data
- 2.All specifications are subject to change by the manufacturer without prior notice

All In One Split

Model name				12kW	14kW	16kW
Model				ACHA-H12/5R2EA19	ACHA-H14/5R2EA19	ACHA-H16/5R2EA19
Power supply	Monobloc Unit	V/Ph/Hz	380-415/3/50			
Heating2	Capacity	kW	11.6	13.6	15.1	
	Rated input	kW	2.37	2.83	3.21	
	COP		4.9	4.8	4.7	
Heating3	Capacity	kW	11.5	14	14.8	
	Rated input	kW	3.54	4.38	4.70	
	COP		3.25	3.2	3.15	
Cooling4	Capacity	kW	11.6	13.6	15.8	
	Rated input	kW	2.58	3.78	4.05	
	EER		4.5	3.6	3.9	
Cooling5	Capacity	kW	11.1	12.5	14	
	Rated input	kW	3.6	4.31	5.09	
	EER		3.05	2.9	2.75	
Seasonal space heating energy efficiency class ⁷	LWT at 35°C		A+++	A+++	A+++	
	LWT at 55°C		A+++	A+++	A+++	
SCOP6	LWT at 35°C		4.71	4.71	4.75	
	LWT at 55°C		3.825	3.825	3.825	
DHW energy efficiency	Water heating energy efficiency class		A+	A+	A+	
	COPDHW		2.88	2.88	2.88	
	Declared load profile		L			
Water pump	Pump head	m	9	9	9	
	Max Flow	m³/h	4.5	4.5	4.5	
	Adapter diameter		DN25	DN25	DN25	
Refrigerant(R290)	Factory charge	kg	1.35	1.35	1.35	
Sound pressure level	Outdoor Unit	dB(A)	45	46	47	
	Indoor Unit	dB(A)	31			
Sound power level	Outdoor Unit	dB	58	59	60	
	Indoor Unit	dB	43			
Packed dimensions (W×D×H)	Outdoor Unit	mm	1355*545*1210			
	Indoor Unit	mm	700*682*1835			
Body dimensions (W×D×H)	Outdoor Unit	mm	1280*420*1040			
	Indoor Unit	mm	600*600*1720			
Operating temperature range	Cooling	°C	-5 ~ 43			
	Heating	°C	-25 ~ 35			
	Domestic hot water	°C	-25 ~ 43			
Setting water temperature range	Cooling	°C	5 ~ 25			
	Heating	°C	25 ~ 80			
	Domestic hot water	°C	30 ~ 75			
Water circuit	Piping connections	inch	G1"BSP			
	DHW Piping connections	inch	G3/4"BSP			
	Safety valve set pressure	MPa	0.3			
	Flow switch	m³/h	0.6			
	Expansion	Volume	L			
	Capacity of the back-up heater	kW	3			
	Water side	Type	Plate type			
Stuffing Quantity	40H/40/20	Outdoor Unit	Unit			
		Outdoor Unit	Unit			

- Note:
1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
 2. Outdoor air temperature 7°C DB, 85% R.H.; EWT 30°C, LWT 35°C.
 3. Outdoor air temperature 7°C DB, 85% R.H.; EWT 47°C, LWT 55°C.
 4. Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.
 5. Outdoor air temperature 35°C DB; EWT 12°C, LWT 7°C.
 6. Seasonal space heating energy efficiency class tested in average climate conditions.
 7. Test standard: EN12102-1
 8. Sound pressure level is the maximum value tested under the two conditions of Notes2 and Notes5.

Remarks:

- 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data
- 2.All specifications are subject to change by the manufacturer without prior notice